

OD-7405

WALL RECESS UNDER WATER LIGHT



SPECIFICATION

- CONSTRUCTION:** Fixture is manufactured in compliance with IEC 60598-1. Electrical protection class 3. IP68 - 1.5 meter. Suitable for continuous immersion.
- BODY:** Body and cover in supreme corrosion proof under water grade 316 stainless steel.
- OPTIC COVER:** High impact resistant transparent safety tempered glass. Able to stand sudden change in temperature of up to 250°C.
- PROTECTION:** Weather proof and durable silicone gasket. Service temperature -40°to +200°C.
- FASTENING:** All external screw is in 316 stainless steel with silicone grease dipping.
- CABLE ENTRY:** IP68 PG9 brass nickle cable gland for H07RN-F cable 2x1.0 from BM - Italy / IMQ approved.
- LAMP HOLDER:** Ceramic case with nickle contact from Vossloh Schwabe - Germany / ENEC approved. T300 rating 10/24.
- WIRING:** Porcelian terminal block from EMC - Italy. T300C 8A 24V cross section 1.5mm² Prewired with 3 meters 2x1 H07RN-F under water cable. Transformer not included.
- FINISHING:** Full body mirror finished.

ACCESSORIES

 Dichroic color filter tempered glass.

Available in red, yellow, blue and green.

- Ordering Code: Red **9-0330-81**
Yellow **9-0330-82**
Blue **9-0330-83**
Green **9-0330-84**

Softening filter

Ordering Code: **9-0050-00**



LOW VOLTAGE TUNGSTEN HALOGEN

Ordering Code:

7405-0-2-281-92

QR-CB51 GU5.3

50W (10° 8200 cd / 36° 1500 cd)



OD-7406

UNDER WATER SPOTLIGHT



SPECIFICATION

- CONSTRUCTION:** Fixture is manufactured in compliance with IEC 60598-1. Electrical protection class 3. IP68 - 1.5 meter. Suitable for continuous immersion.
- BODY:** Body and cover in supreme corrosion proof under water grade 316 stainless steel.
- OPTIC COVER:** High impact resistant transparent safety tempered glass. Able to stand sudden change in temperature of up to 250°C.
- PROTECTION:** Weather proof and durable silicone gasket. Service temperature -40°to +200°C.
- FASTENING:** All external screw is in 316 stainless steel with silicone grease dipping.
- CABLE ENTRY:** IP68 PG9 brass nickle cable gland for H07RN-F cable 2x1.0 from BM - Italy / IMQ approved.
- LAMP HOLDER:** Ceramic case with nickle contact from Vossloh Schwabe - Germany / ENEC approved. T300 rating 10/24.
- WIRING:** Porcelian terminal block from EMC - Italy. T300C 8A 24V cross section 1.5mm². Prewired with 3 meters 2x1 H07RN-F under water cable. Transformer not included.
- FINISHING:** Full body mirror finished.


ACCESSORIES Dichroic color filter tempered glass.

Available in red, yellow, blue and green.

- Ordering Code: Red **9-0330-81**
Yellow **9-0330-82**
Blue **9-0330-83**
Green **9-0330-84**

Softening filter

Ordering Code: **9-0050-00**

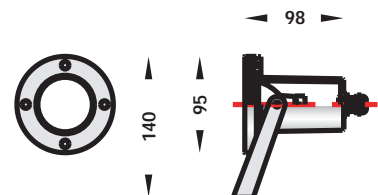

LOW VOLTAGE TUNGSTEN HALOGEN

Ordering Code:

7406-0-2-281-92

QR-CB51 GU5.3

50W (10° 8200 cd / 36° 1500 cd)

