

# Galex Mini Two

Surface Mounted

Versatile

NEW



7.6W Power  
Up to 424lm Lumen  
2700K 3000K 4000K CCT

CE RoHS 355° 80° IP20 0.8m

Product Information	<b>Power</b>	7.6W		
	<b>CRI</b>	>90Ra		
	<b>CCT</b>	2700K	3000K	4000K
	<b>System Lumen</b>	400lm	412lm	424lm
	<b>LED Efficacy</b>	54lm/W		
	<b>LOR</b>	>90%		
	<b>Driver</b>	Dimmable 230V LED*		
	<b>Dimmable with</b>	Leading/Trailing edge dimmer		
<b>Lens</b>	 15° 30° included			



\* Due to the 230V frequency of 50Hz, some people may experience discomfort caused by the strobe effect of the light.

On Request	Article No.	Description
	2.01.1015	Lens 15° for Galex Mini Two

Galex Mini Two 3000K

H (m)	Beam (Ø cm)	Field (Ø cm)	Beam (lux)
1	58	89	1372
2	116	179	343
3	174	268	152
4	232	358	86
5	290	447	55

Beam (50%) Angle: 32° Field (10%) Angle: 48°

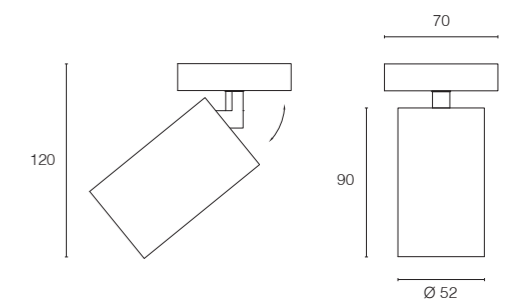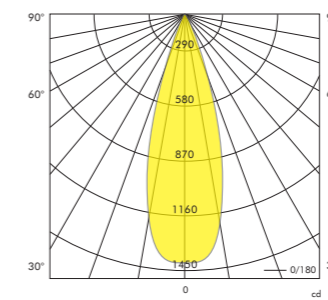

Article No.	Product Name	Color	System Lumen	CCT	CRI	Cooling	Power	Lens
2.17.2039	Surface mounted LED spot Galex Mini Two versatile	White	400lm	2700K	>90Ra	Passive	7.6W	30°
2.17.2040	Surface mounted LED spot Galex Mini Two versatile	White	412lm	3000K	>90Ra	Passive	7.6W	30°
2.17.2042	Surface mounted LED spot Galex Mini Two versatile	Black	400lm	2700K	>90Ra	Passive	7.6W	30°
2.17.2043	Surface mounted LED spot Galex Mini Two versatile	Black	412lm	3000K	>90Ra	Passive	7.6W	30°

Article No.	Product Name	Color	System Lumen	CCT	CRI	Cooling	Power	Lens
2.17.2036*	Surface mounted LED spot Galex Mini Two versatile	Grey	400lm	2700K	>90Ra	Passive	7.6W	30°
2.17.2037*	Surface mounted LED spot Galex Mini Two versatile	Grey	412lm	3000K	>90Ra	Passive	7.6W	30°
2.17.2038*	Surface mounted LED spot Galex Mini Two versatile	Grey	424lm	4000K	>90Ra	Passive	7.6W	30°
2.17.2041*	Surface mounted LED spot Galex Mini Two versatile	White	424lm	4000K	>90Ra	Passive	7.6W	30°
2.17.2044*	Surface mounted LED spot Galex Mini Two versatile	Black	424lm	4000K	>90Ra	Passive	7.6W	30°

\* Minimum order quantity: 50 units